



# DRIVER AND DIMMER INFORMATION

CONSTANT VOLTAGE DRIVER | CONSTANT CURRENT DRIVER | 0-10V DIMMER

## Non-Dimming Wiring

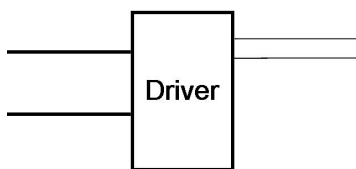


## Dimming Wiring

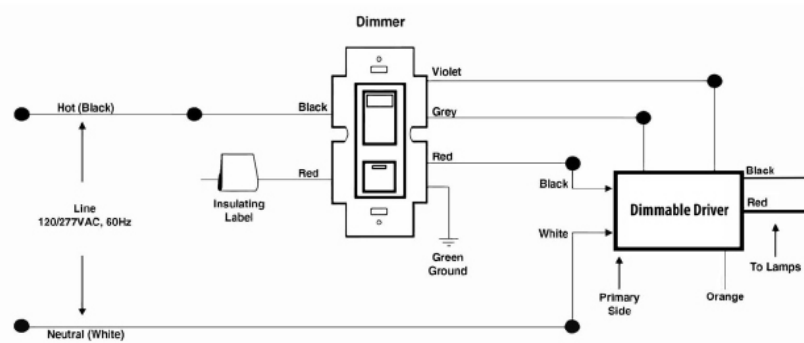

## DRIVERS RECOMMENDED FOR SR25, SR50, ST10, ST40 6"

POWER SUPPLY	NUMBER OF LIGHTS
PSLUC-010S070DSM	1
PSLUC-018S070DSP	2
PSLPF-16D-24	2
PSLPF-25D-36	3
PSLPF-40D-54	4 or 5
PSEUC-026S070DSC	2 OR 3
PSEUC-042S070DSC	2 TO 5
PSEUC-120T070DT	up to 3 series of 3 to 5
PSEUC-160Q070DT	up to 4 series of 3 to 5
PSEUC-240H070DT	up to 6 series of 3 to 5

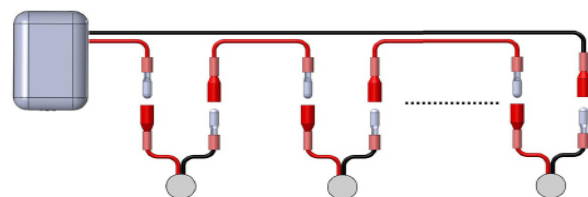

CALL FOR DRIVER OPTIONS FOR ST30 DIRECT/INDIRECT, RGB COLOR CHANGING AND COLOR TEMPERATURE CHANGING FIXTURES

## DRIVERS RECOMMENDED FOR ST30 OR ST40 WITH 3, 5 OR 6 MODULES

POWER SUPPLY	NUMBER OF LIGHTS
PSEUC-042S070DSC	1
PSEUC-120T070DT	up to 3
PSEUC-160Q070DT	up to 4
PSEUC-240H070DT	up to 6

## DRIVERS RECOMMENDED FOR ST30HP OR ST40 WITH 10 MODULES


POWER SUPPLY	NUMBER OF LIGHTS
PSLPF-60D-48	1
PSEUC-240H070DT	3
PSPLN-60-48	1 (non dimmable)

## DRIVERS RECOMMENDED FOR ST30 4FT

POWER SUPPLY	NUMBER OF LIGHTS
PSLUC-042S070DSW	1
PPSLPF-60D-48	1

# EMERGENCY LIGHTING INVERTERS

120/277 VAC | 60 Hz | 90 MIN RUN TIME

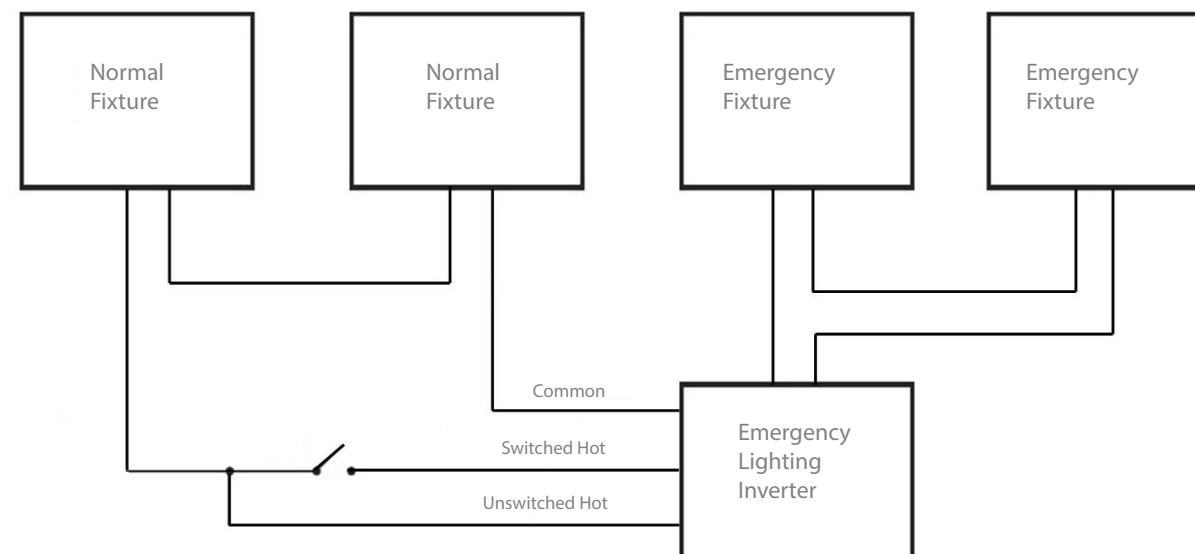

PRODUCT	WATT MAX	DIMENSIONS	WEIGHT	INPUT	RUN TIME	CHARGE TIME
ELI-100-SD	100	18-5/8" x 9-5/8" x 4-3/8"	37	120-277V	90 MIN	24 HR
ELI-250-SD	250	18-5/8" x 10-1/8" x 8-1/4"	89	120-277V	90 MIN	24 HR
BSL722	23	9.4"-2.2"-1.05"	4	120-277V	90 MIN	24 HR