



SUNSTRIP30 (ST30) CEILING LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP30
INPUT	700mA or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	30W or 60W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum
WEIGHT	1.2 lbs (.55kg) or 2.4 lbs (1.1kg)
LENGTH	24", 36", 48" or 96"
MOUNTING	Recessed, Surface mounted, Suspended
LIFETIME	> 60,000 hrs
WARRANTY	Five year warranty
OPTICS	Optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90° Diffused 170°

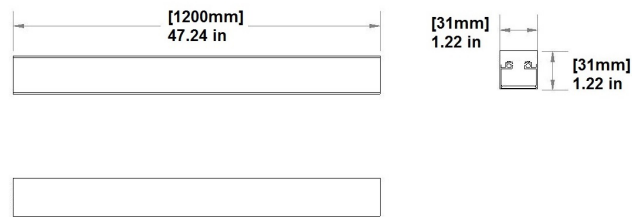

DAMP LOCATION [IP64]

Higher CRI (85, 90, or 95) are available upon request.

May be Magnetized to Metal Surface
Brackets are also available for Surface Mount

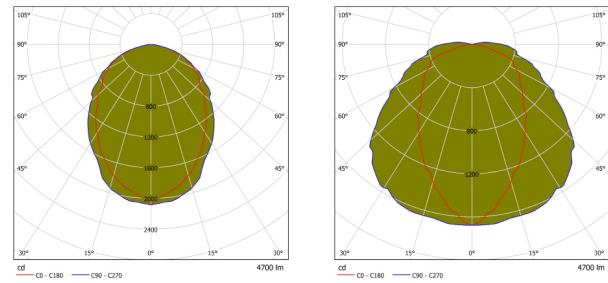

ST30Y48P4X15-D-50

ST30Y48P4X15-DD-50

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST30Y48P4X15N	700 mA	30 W	4,700 LM	156 LM/W
ST30Y96P8X15N	1400 mA	60 W	9,400 LM	156 LM/W

CCT	2,700K	4,100K	5,000K
LIGHT OUTPUT CONVERSION	.87	0.95	1
CRI	80	80	80

PRODUCT	LENGTH	LED MODULE SIZE		CURRENT
ST30				-
ST30	Y48	48 INCHES	P4X15N 4 MODULES WITH 15 CHIPS EACH	0700 mA
	Y96	96 INCHES	P8X15N 8 MODULES WITH 15 CHIPS EACH	1400 mA

DIFFUSED	HOUSING COLOR		COLOR TEMPERATURE		MOUNTING BRACKET STYLE				
-	-	-	-	-	-	-	-	-	-
D	DIFFUSED	SV SILVER	50	5000K	RCM	RECESSED CEILING MOUNT	TDS-WW	TDS WALL WASHER	
DD	DOME DIFFUSED	BK BLACK	41	4100K	SM	SURFACE MOUNT	RCS-WW	RCS WALL WASHER	
ND	NON-DIFFUSED		27	2700K	TDS	TRADITIONAL SUSPENDED BASE			
			30	3000K	RCS	RECESSED SUSPENDED BASE			
					WM	WALL MOUNT			
					SWV	SWIVEL MOUNT			

A-11

