



SR25-FIBER ACCENT LUMINAIRE

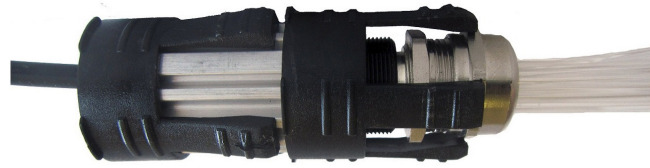

PRODUCT NAME	SunStar25 Fiber Light Source
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	2.2W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb
LENGTH	3"
MOUNTING	Recessed mount into ceiling
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	N/A

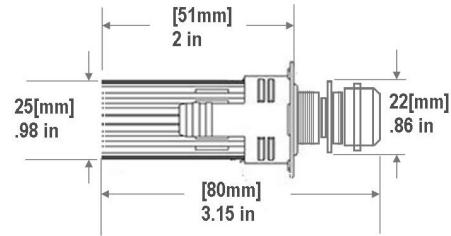

CE WET LOCATION [IP66]

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR25M1X1	700 mA	2.2 W	140 LM	64 LM/W

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.11
CRI	80	80	80	75

Specialty design with higher CRI (85, 90, or 95) available upon request.

PRODUCT	LED MODULE SIZE	FIRE RATED	CURRENT	HOUSING COLOR	COLOR TEMPERATURE	TRIM
SR25		-	-0700	-SV	-	-
SR25	M1X1 1 MODULE 1 CHIP		0700 MA	SV SILVER	55 5500K 41 4100K 35 3500K 27 2700K	F10 10MM ADAPTOR

