





SR25-FIBER ACCENT LUMINAIRE

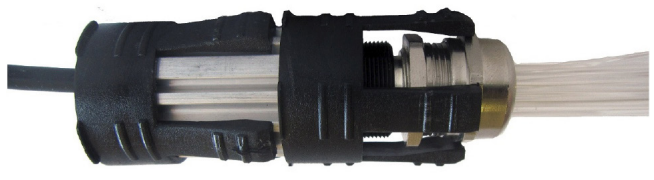

PRODUCT NAME	SunStar25 Fiber Light Source
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	2.2W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb
LENGTH	3"
MOUNTING	Recessed mount into ceiling
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	N/A

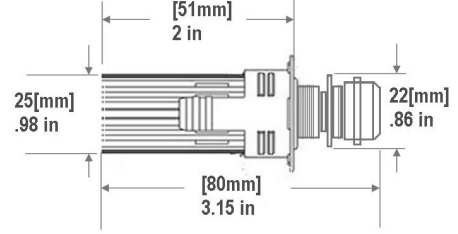

CE WET LOCATION [IP66]

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR25M1X1	700 mA	2.2 W	140 LM	64 LM/W
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.11
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE	FIRE RATED	CURRENT	HOUSING COLOR	COLOR TEMPERATURE	TRIM
SR25		-	-0700	-SV	-	-
SR25	M1X1 1 MODULE 1 CHIP		0700 MA	SV SILVER	55 5500K 41 4100K 35 3500K 27 2700K	F10 10MM ADAPTOR

