



SUNSTAR25 (SR25) CEILING LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER

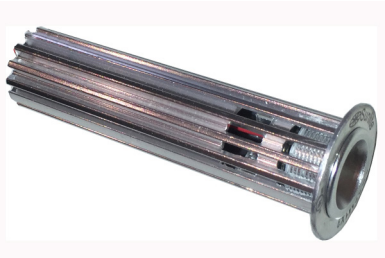

Patented Fixture,
For Non-insulated ceiling
Upgradable Down Light LED + Can Housing
Do Not Require Additional Can or Rough in Kits to Install

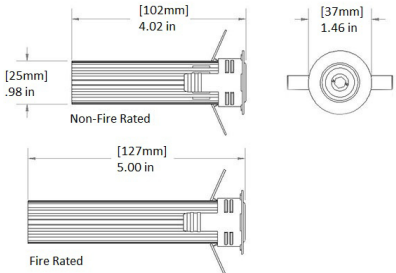


PRODUCT NAME	SUNSTAR25
INPUT	700mA / ~10VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	~0.1 lb (0.05 kg)
SIZE	1" in diameter, 4" or 5" (fire rated) in length
MOUNTING	Recessed mount into ceiling
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens, aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110°
EQUIVALENT USE	Traditional 50-60W Halogen, Recessed in Ceiling without Can




DAMP LOCATION

Higher CRI (85, 90, or 95) are available upon request.

Also Available in Tunable White
Also Suitable for Soffit and Canopy



SR25M1X6-35



SR25M1X6-35-D



PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR25 M1X3	700 mA	6.5 W	693 LM	107 LM/W
SR25 M1X6	700 mA	6.5 W	832 LM	128 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE		FIRE RATED		CURRENT		HOUSING COLOR		COLOR TEMPERATURE		TRIM
SR25			-		-0700		-SV		-		-
SR25	M1X3	1 MODULE 3 CHIPS	F	FIRE RATED	0700	mA	SV	SILVER	55	5500K	2SV 2" Ø SILVER
	M1X6	1 MODULE 6 CHIPS							41	4100K	2WT 2" Ø WHITE
									35	3500K	2SV 2" Ø SILVER
									27	2700K	
									27/55	CCT TUNING	



CEILING
COVE
PENDANTS
WALL
UNDER CABINET
ACCENT
EXTERIOR
SOFFIT
SMART CONTROL RGB
GREEN WALL
TUNNEL
WAREHOUSE
CAR WASH
SPECIAL APPLICATIONS
ACCESSORIES

SR25-FIBER
ACCENT LUMINAIRE

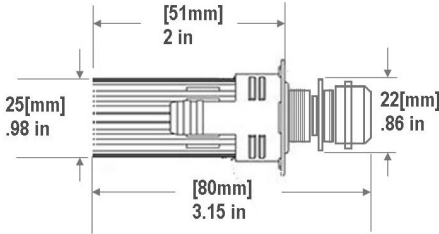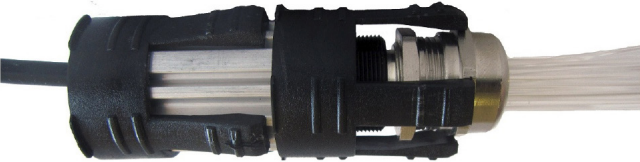

PRODUCT NAME	SunStar25 Fiber Light Source
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	2.2W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb
LENGTH	3"
MOUNTING	Recessed mount into ceiling
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	N/A

CE WET LOCATION [IP66]


PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR25M1X1	700 mA	2.2 W	140 LM	64 LM/W
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.11
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE	FIRE RATED	CURRENT	HOUSING COLOR	COLOR TEMPERATURE	TRIM
SR25		-	-0700	-SV	-	-
SR25	M1X1 1 MODULE 1 CHIP		0700 mA	SV SILVER	55 5500K 41 4100K 35 3500K 27 2700K	F10 10MM ADAPTOR



SUNSTAR25 (SR25)
SOFFIT LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER

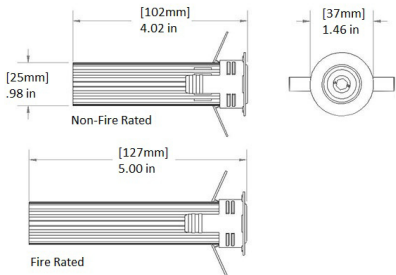


PRODUCT NAME	SUNSTAR25
INPUT	700mA / ~10VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	~0.1 lb (0.05 kg)
LENGTH	1" in diameter, 4" in length
MOUNTING	Recessed mount into ceiling
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110° Traditional 50-60W Halogen, Recessed in Ceiling without Can



Higher CRI (85, 90, or 95) are available upon request.

Also Available in Tunable White

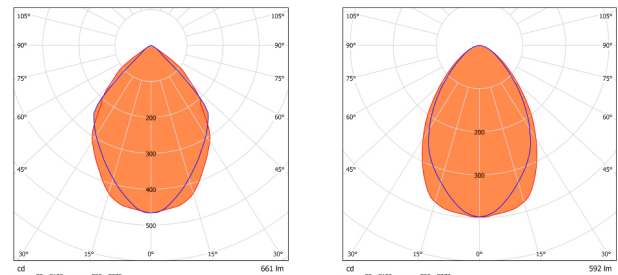

SR25M1X3-27

SR25M1X3-27-D

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR25 M1X1	700 mA	2.2 W	220 LM	101 LM/W
SR25 M1X3	700 mA	6.5 W	661 LM	101 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	1	1.05	1.10	1.22
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE		FIRE RATED		CURRENT		HOUSING COLOR		COLOR TEMPERATURE		TRIM	
SR25			-		-0700		-SV		-		-	
SR25	M1X1	1 MODULE 1 CHIPS	F	FIRE RATED	0700	mA	SV	SILVER	55	5500K	2SV	2" Ø SILVER
	M1X3	1 MODULE 3 CHIPS							41	4100K	2WT	2" Ø WHITE
									35	3500K	2SV	2" Ø SILVER
									27	2700K		
									27/55	CCT TUNING		
									RGB	RGB		

