



# SUNSTAR50-RC RECESSED UNDER CABINET LUMINAIRE


0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTAR50-RC
INPUT	700mA / ~10VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.2 lb (0.08 kg)
SIZE	2" in Diameter, 3" in Length
MOUNTING	Recessed Mount into ceiling, Surface Mount, Mounted to Conduit
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens Aluminum reflector, optional translucent diffuse
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	130°
EQUIVALENCE	Traditional 50-60W halogen, Recessed in any Building Material without a Can or Rough In Kit

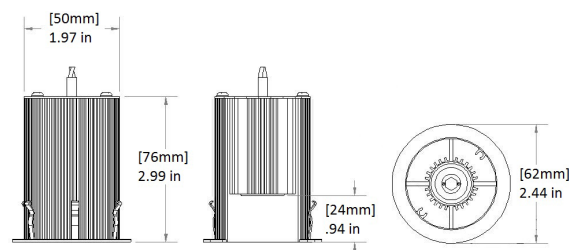

  Type IC, Fire Rated  
DAMP LOCATION [IP64]



SR50M1X6-RC-35



SR50M1X6-RC-35

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
SR50 M1X3	700 mA	6.5 W	578 LM	89 LM/W
SR50 M1X6	700 mA	6.5 W	693 LM	107 LM/W

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE	HOUSING	CURRENT	HOUSING COLOR	BEAM ANGLE	COLOR TEMPERATURE	DIFFUSER
SR50		-RC	-0700	-	-	-	-
SR50	M1X3 1 MODULE 3 CHIPS	RC RECESSED	0700 mA	SV SILVER	50 50°	55 5500K	D DIFFUSED
				BK BLACK	90 90°	41 4100K	
	M1X6 1 MODULE 6 CHIPS				140 140°	35 3500K	
						27 2700K	
					27/55 CCT TUNING		
					RGB RGB		



ACCESSORIES COLOR CHANGING ACCENT APPLICATIONS SPECIAL GARAGE GREEN WALL PARKING GARAGE GREEN WALL STOVE WAREHOUSE WALL WAREHOUSE WALL STOVE UNDER CABINET TABLE PENDANTS EXTERIOR COVE CEILING