


SUNSTRIP10 COVE LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP10
INPUT	700mA or 12VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb (0.07 kg) for 20" length
LENGTH	7", 14", or 20"
MOUNTING	Swivel Mount, Magnet Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	120°

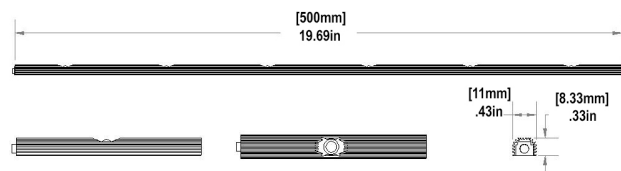


DRY/WET LOCATION [IP64/IP66]

The SunStrip10 is also suitable for Undercabinet, Shelf and Mobile Store and Display Case.



ST10Y20M6-55



ST10Y20M6-55

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST10Y20M6X1	700 mA	6.5 W	820 LM	126 LM/W
ST10Y14M4X1	700 mA	4.4 W	547 LM	126 LM/W
ST10Y07M2X1	700 mA	2.2 W	273 LM	126 LM/W

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75

Specialty design with higher CRI (85, 90, or 95) available upon request.

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT/ VOLTAGE
ST10			-0700
ST10	Y20	20 INCHES	0700 MA
	Y14	14 INCHES	12 VDC
	Y07	7 INCHES	
HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	WET LOCATION
SV SILVER	55 5500K 41 4100K 35 3500K 27 2700K	MG MAGNETIC MOUNT SWV SWIVEL MOUNT	W WET LOCATON

