


# SUNSTRIP10 (ST10) COVE LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER



PRODUCT NAME	SUNSTRIP10
INPUT	700mA or 12VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb (0.07 kg) for 20" length
LENGTH	7", 14", or 20"
MOUNTING	Swivel Mount, Magnet Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	120°


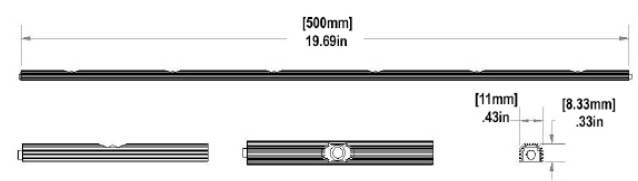


DAMP LOCATION

Higher CRI (85, 90, or 95) are available upon request.

May be Magnetized to Metal Surface  
Brackets are also available for Surface Mount

Also suitable for Undercabinet, Shelf and Locker and Display Case.



PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST10Y20M6X1	700 mA	6.5 W	820 LM	126 LM/W
ST10Y14M4X1	700 mA	4.4 W	547 LM	126 LM/W
ST10Y07M2X1	700 mA	2.2 W	273 LM	126 LM/W

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75

ST10Y20M6-55      ST10Y20M6-55

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT/ VOLTAGE
<b>ST10</b>			<b>-0700</b>
ST10	Y20    20 INCHES	M6X1    6 MODULES WITH 1 CHIP EACH	0700    mA
	Y14    14 INCHES	M4X1    4 MODULES WITH 1 CHIP EACH	12    VDC
	Y07    7 INCHES	M2X1    2 MODULES WITH 1 CHIP EACH	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	WET LOCATION
SV    SILVER	55    5500K	MG    MAGNETIC MOUNT	W    WET LOCATON
	41    4100K	SWV   SWIVEL MOUNT	
	35    3500K		
	27    2700K		

B-1






# SUNSTRIP10 (ST10) UNDER CABINET LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP10
INPUT	700mA or 12VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb (0.07 kg) for 20" length
LENGTH	7", 14", or 20"
MOUNTING	Magnet Mount, Swivel Mount
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	130°

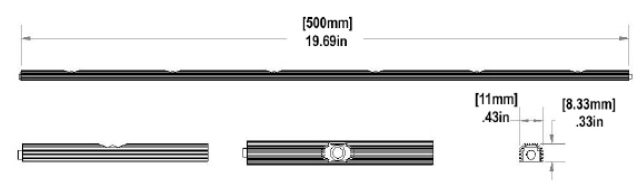


DAMP LOCATION

Higher CRI (85, 90, or 95) are available upon request.  
Also Suitable for Cove, Shelf, Locker, Display Case.



ST10Y20M6-55



ST10Y20M6-55

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST10 M6X1	700 mA	6.5 W	820 LM	126 LM/W

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT/VOLTAGE
ST10			-
ST10	Y20 20 INCHES	M6X1 6 MODULES WITH 1 CHIP EACH	0700 mA
	Y14 14 INCHES	M4X1 4 MODULES WITH 1 CHIP EACH	12 VDC
	Y07 7 INCHES	M2X1 2 MODULES WITH 1 CHIP EACH	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	WET LOCATION
SV SILVER	55 5500K	MG MAGNETIC MOUNT	W WET LOCATON
	41 4100K	SWV SWIVEL MOUNT	
	35 3500K		
	27 2700K		


E-1






# SUNSTRIP10 (ST10) ACCENT LUMINAIRE



0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER

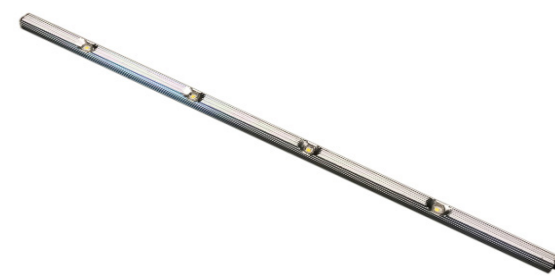

PRODUCT NAME	SUNSTRIP10
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb (0.07 kg) for 20" length
LENGTH	7", 14", or 20"
MOUNTING	Recessed mount into ceiling
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	120°

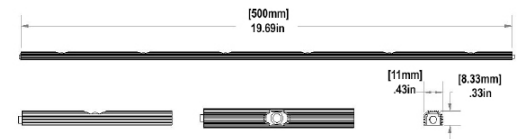

Specialty design with higher CRI (85, 90, or 95) available upon request.



PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST10 M6X1	700 mA	6.5 W	820 LM	126 LM/W

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75


ST10Y20M6-55      ST10Y20M6-55

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT/ VOLTAGE
ST10			-
ST10	Y20      20 INCHES	M6X1      6 MODULES WITH 1 CHIP EACH	0700      mA
	Y14      14 INCHES	M4X1      4 MODULES WITH 1 CHIP EACH	12      VDC
	Y07      7 INCHES	M2X1      2 MODULES WITH 1 CHIP EACH	

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	WET LOCATION
	-	-	-
SV      SILVER	55      5500K	MG      MAGNETIC MOUNT	W      WET LOCATON
	41      4100K	SWV      SWIVEL MOUNT	
	35      3500K		
	27      2700K		

F-5

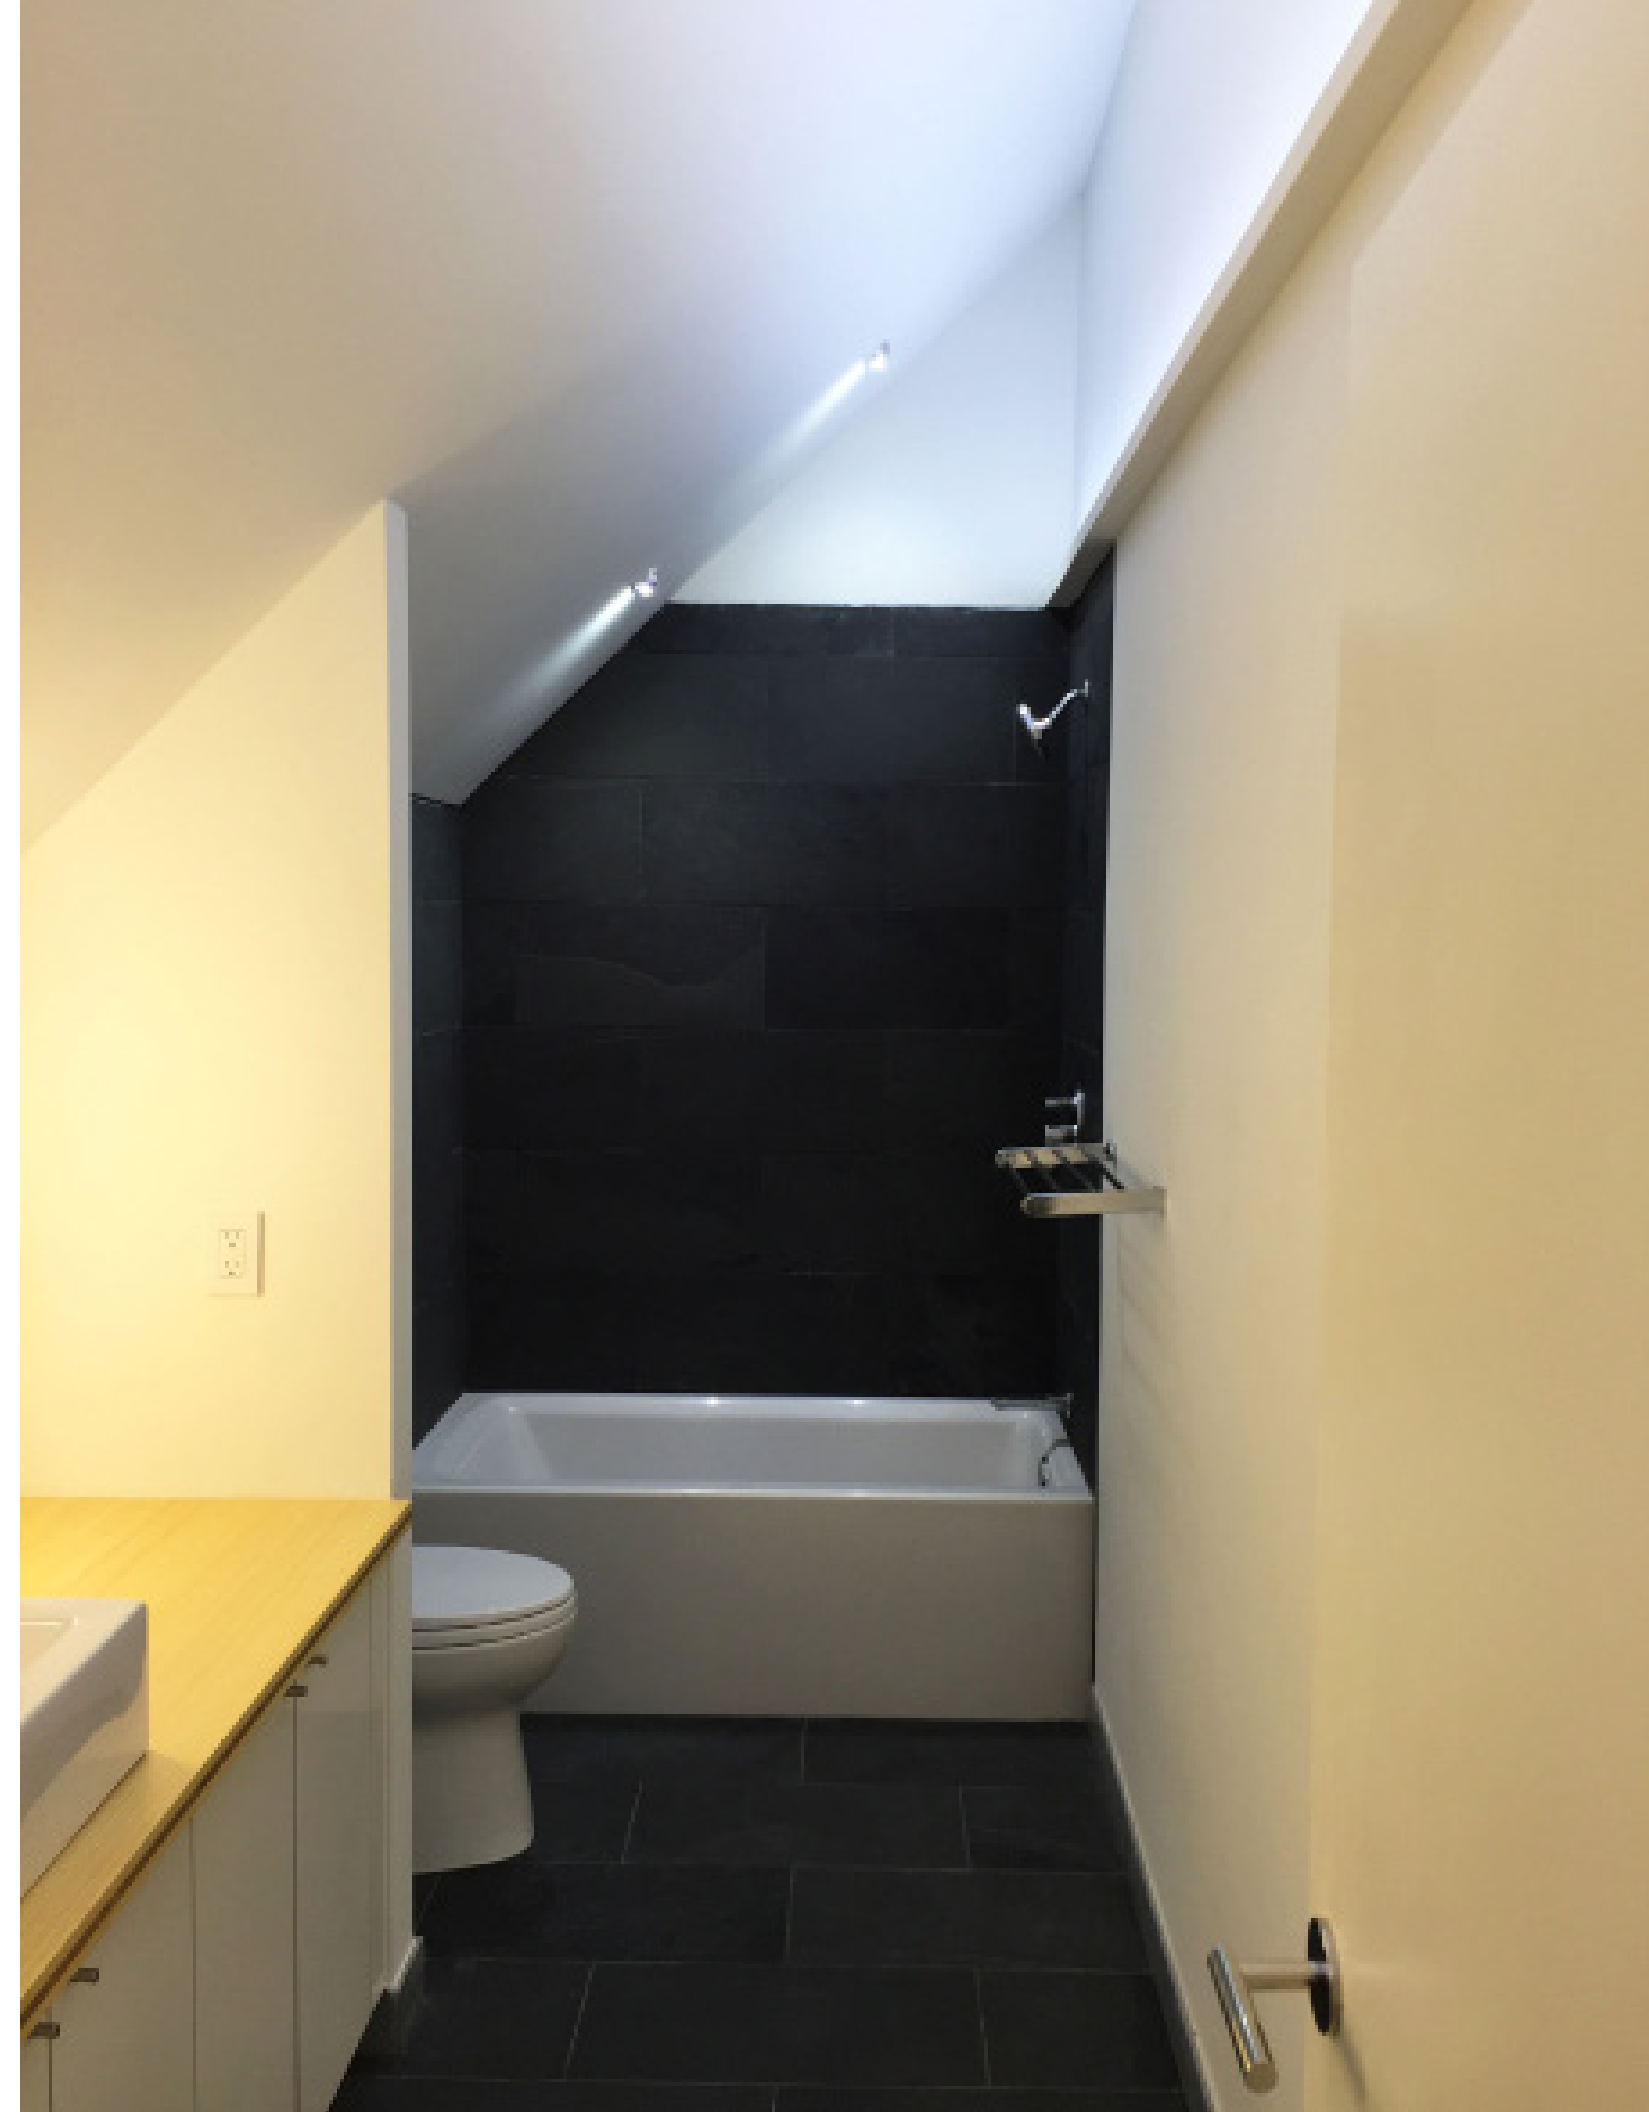


# SUNSTRIP10-12V VEHICLE LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP10-12V
INPUT	12VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	N/A
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.1 lb (0.07 kg) for 20" length
LENGTH	20"
MOUNTING	Swivel Mounted
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector,
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	120°

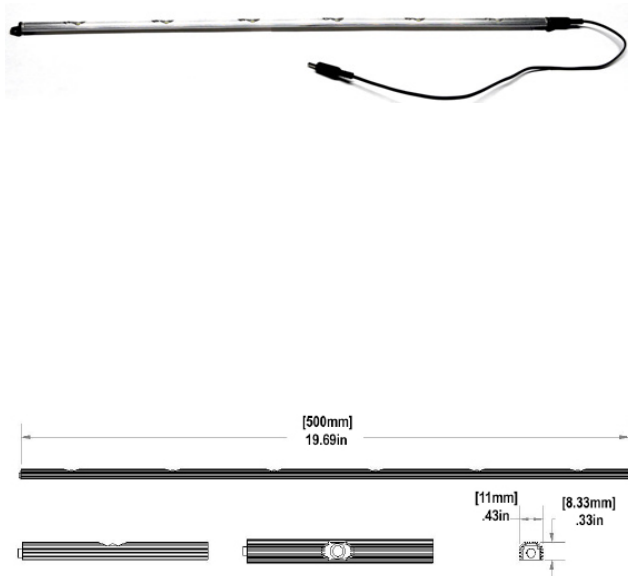


DRY/WET LOCATION [IP64/IP66]

The SunStrip10 is also suitable for Cove, Undercabinet, Shelf and Display Case.



ST10Y20M6-55



ST10Y20M6-55

PRODUCT & LED MODULE SIZE	INPUT VOLTAGE	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST10Y20M6X1	12VDC	6.5 W	730 LM	91 LM/W
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.77	.80	.85	1
CRI	80	80	80	75

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT/ VOLTAGE
ST10			-12
ST10	Y20     20 INCHES	M6X1     6 MODULES WITH 1 CHIP EACH	12     12VDC

HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE	WET LOCATION
SV     SILVER	55     5500K	MG     MAGNETIC MOUNT	W     WET LOCATON
	41     4100K	SWV     SWIVEL MOUNT	
	35     3500K		
	27     2700K		

N-3

