


# SUNSTRIP30 CEILING LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER

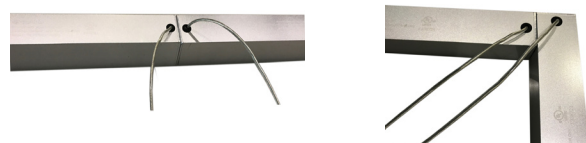


Multiple fixtures can be connected as shown above

<b>PRODUCT NAME</b>	SUNSTRIP30
<b>INPUT</b>	700mA or 1400mA
<b>POWER FACTOR</b>	>0.9
<b>POWER CONSUMPTION</b>	30W or 60W
<b>DIMMING</b>	0-10V dimming
<b>MATERIAL</b>	Anodized extruded aluminum, glass lens
<b>WEIGHT</b>	1.2 lbs (.55kg) or 2.4 lbs (1.1kg)
<b>LENGTH</b>	24", 36", 48" or 96"
<b>MOUNTING</b>	Recessed, Surface mounted, Swivel, Suspended
<b>LIFETIME</b>	> 60,000 hrs
<b>WARRANTY</b>	Five year warranty
<b>OPTICS</b>	Optional translucent diffuser
<b>OPERATING RANGE</b>	-30°C to 40°C
<b>BEAM ANGLE</b>	Standard 90° Diffused 170°



DAMP LOCATION [IP64]

ST30 Direct/Indirect fixtures can also be connected as shown

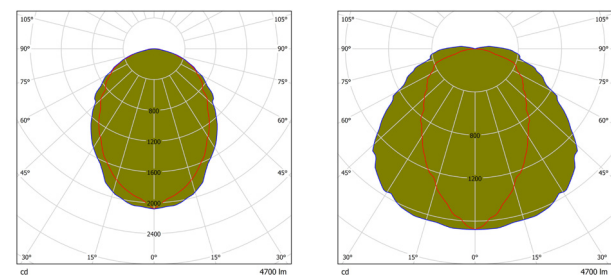

ST30Y48P4X15-D-50

ST30Y48P4X15-DD-50

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST30Y48P4X15N	700 mA	30 W	4,700 LM	156 LM/W
ST30Y96P8X15N	1400 mA	60 W	9,400 LM	156 LM/W

CCT	2,700K	4,100K	5,000K
<b>LIGHT OUTPUT CONVERSION</b>	.87	0.95	1
<b>CRI</b>	80	80	80

Specialty design with higher CRI (85, 90, or 95) available upon request.

PRODUCT	LENGTH	LED MODULE SIZE	CURRENT
<b>ST30</b>			-
<b>ST30</b>	<b>Y48</b>	48 INCHES <b>P4X15N</b> 4 MODULES WITH 15 CHIPS EACH	<b>0700</b> mA
	<b>Y96</b>	96 INCHES <b>P8X15N</b> 8 MODULES WITH 15 CHIPS EACH	<b>1400</b> mA

DIFFUSED	HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
-	-	-	-
<b>D</b>	DIFFUSED <b>SV</b> SILVER	<b>50</b> 5000K	<b>RCM</b> RECESSED CEILING MOUNT <b>TDS-WW</b> TDS WALL WASHER
<b>DD</b>	DOMED DIFFUSED <b>BK</b> BLACK	<b>41</b> 4100K	<b>SM</b> SURFACE MOUNT <b>RCS-WW</b> RCS WALL WASHER
<b>ND</b>	NON-DIFFUSED	<b>27</b> 2700K	<b>TDS</b> TRADITIONAL SUSPENDED BASE
		<b>30</b> 3000K	<b>RCS</b> RECESSED SUSPENDED BASE
			<b>WM</b> WALL MOUNT
			<b>SWV</b> SWIVEL MOUNT

A-13

