


SUNSTRIP40 CEILING LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	SUNSTRIP40
INPUT	700 or 1400mA
POWER FACTOR	>0.9
POWER CONSUMPTION	39W or 65W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	1.0 lbs (.44kg) or 1.3 lbs (0.57kg)
LENGTH	36" or 48"
MOUNTING	Magnet Mounted, Swivel Mounted, Suspended
LIFETIME	> 60,000 hrs
WARRANTY	Ten year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Recessed 90°, Standard 120°



DRY/WET LOCATION [IP64/IP67]



The SunStrip40 is also suitable for Green Wall, Wall Wash, Cove, Tunnel, Parking Garage and Warehouse.

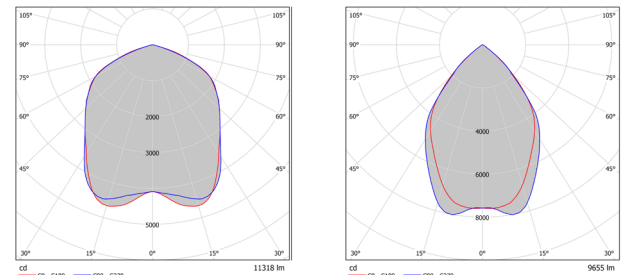

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
ST40Y36M6X6	700 mA	39 W	6,790 LM	174 LM/W
ST40Y48M10X6	700 mA	65 W	11,318 LM	174 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.86	.90	.95	1
CRI	80	80	80	75

Specialty design with higher CRI (85, 90, or 95) available upon request.

PRODUCT	LENGTH	LED MODULE TYPE	CURRENT	BEAM ANGLE	HOUSING COLOR	COLOR TEMPERATURE		
ST40	Y48		-1400		-	-		
ST40	Y36	36 INCHES	M6X3	6 MODULES 3 CHIPS EACH	0700 mA	N/A 120°	SV SILVER	55 5500K
	Y36	36 INCHES	M6X6	6 MODULES 6 CHIPS EACH	0700 mA	R 90°	BK BLACK	41 4100K
	Y48	48 INCHES	M10X3	10 MODULES 3 CHIPS EACH	1400 mA			35 3500K
	Y48	48 INCHES	M10X6	10 MODULES 6 CHIPS EACH	1400 mA			27 2700K

MOUNTING BRACKET STYLE	LOCATION
-	-
SW SWIVEL MOUNT	EX EXTERIOR WET
SMB BLACK SURFACE MOUNT	
MG MAGNETIC MOUNT	
RCS RECESSED SUSPENDED	
TDS TADITIONAL SUSPENDED	

