


WALLMOUNT25 EXTERIOR LUMINAIRE


0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER



PRODUCT NAME	WALLMOUNT25
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.2 lb (0.09 kg)
LENGTH	4" or custom length
MOUNTING	Swivel Mounted
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110°

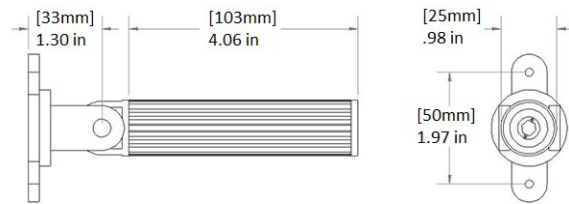

The WallMount25 is also suitable for Interior use with ten year warranty.

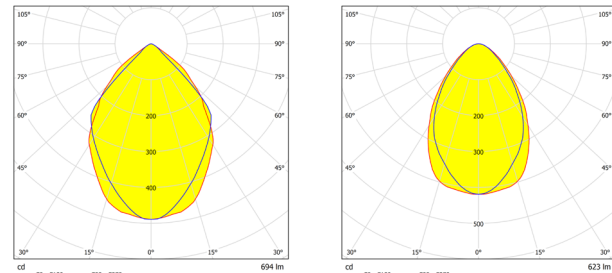

WM25M1X3-35

WM25M1X3-D-35

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
WM25 M1X1	700 mA	2.2 W	231 LM	107 LM/W
WM25 M1X3	700 mA	6.5 W	693 LM	107 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

Specialty design with higher CRI (85, 90, or 95) available upon request.

PRODUCT	LED MODULE SIZE	CURRENT	HOUSING COLOR	HOUSING LENGTH
WM25		-	-	-
WM25	M1X1 1 MODULE 1 CHIPS	0700 mA	SV SILVER	04 4 INCHES
	M1X3 1 MODULE 3 CHIPS		BK BLACK	CL CUSTOM LENGTH
			BR BROWN	
			CC CUSTOM COLOR	



ACCESSORIES COLORED LIGHTING ACCENT APPLICATIONS SPECIAL APPLICATIONS PARKING GARAGE GREEN WALL GREEN WALL WAREHOUSE WALL WAREHOUSE WALL STOVE UNDER CABINET TABLE PENDANTS EXTERIOR COVE CEILING