




SR25-WALLMOUNT(WM25) WALL LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER




PRODUCT NAME	WALLMOUNT25
INPUT	700mA
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.2 lb (0.09 kg)
LENGTH	4"
MOUNTING	Swivel Mounted
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110°

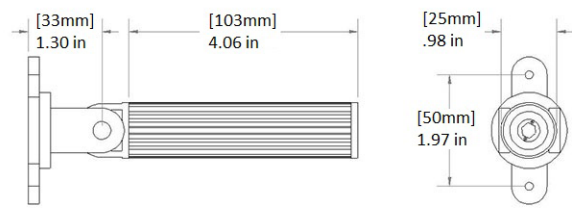


WET LOCATION [IP66]

Patented Fixture
Also suitable for Exterior.

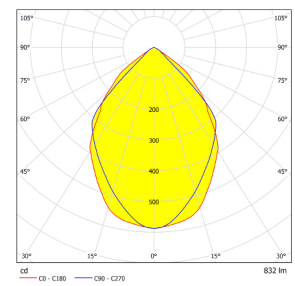

WM25M1X6-35

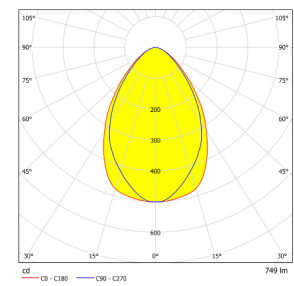

WM25M1X6-D-55

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
WM25 M1X3	700 mA	6.5 W	693 LM	106 LM/W
WM25 M1X6	700 mA	6.5 W	832 LM	128 LM/W
Specialty designs with different chips per module available upon request				
CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

PRODUCT	LED MODULE SIZE	CURRENT	HOUSING COLOR	HOUSING LENGTH
WM25		-	-	-
WM25	M1X3 1 MODULE 3 CHIPS	0700 mA	SV SILVER	04 4 INCHES
	M1X6 1 MODULE 6 CHIPS		BK BLACK	CL CUSTOM LENGTH
			BR BROWN	
			CC CUSTOM COLOR	

