




# SR25-PENDANT (PD25) PENDANT LUMINAIRE

0-10V DIMMING | SMART LIGHTING COMPATIBLE | EXTERNAL DRIVER





Patented Fixture  
Optional bubble acrylic attachment

PRODUCT NAME	PENDANT25
INPUT	700mA / ~10VDC
POWER FACTOR	>0.9
POWER CONSUMPTION	6.5W
DIMMING	0-10V dimming
MATERIAL	Anodized extruded aluminum, glass lens
WEIGHT	0.3 lb (0.15kg) for 12", 1.1 lb (0.49kg) for 48"
LENGTH	8" or custom length
MOUNTING	Ceiling Suspended
LIFETIME	> 60,000 hrs
WARRANTY	Five year limited warranty
OPTICS	Milled aluminum primary optic, clear glass lens aluminum reflector, optional translucent diffuser
OPERATING RANGE	-30°C to 40°C
BEAM ANGLE	Standard 90°, Diffused 110°

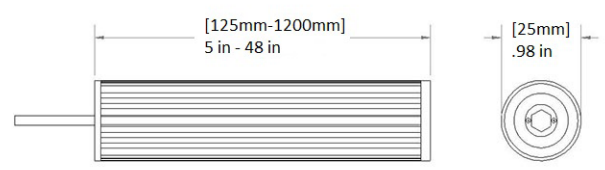

DAMP LOCATION (IP64)

Higher CRI (85, 90, or 95) are available upon request.

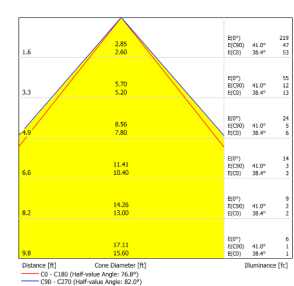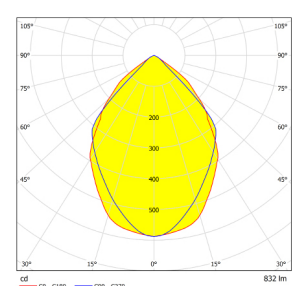

PRODUCT & LED MODULE SIZE	INPUT CURRENT	POWER CONSUMED	LUMEN OUTPUT	FIXTURE EFFICACY
PD25 M1X3	700 mA	6.5 W	693 LM	107 LM/W
PD25 M1X6	700 mA	6.5 W	832 LM	128 LM/W

Specialty designs with different chips per module available upon request

CCT	2,700K	3,500K	4,100K	5,500K
LIGHT OUTPUT CONVERSION	.95	1.0	1.05	1.16
CRI	80	80	80	75

PD25M1X6-35 PD25M1X6-35

PRODUCT	LED MODULE SIZE	CURRENT	HOUSING COLOR
PD25		-0700	-
PD25	M1X3 1 MODULE 3 CHIPS	0700 mA	SV SILVER GR GREEN
	M1X6 1 MODULE 6 CHIPS		BK BLACK PR PURPLE
			BR BROWN CC CUSTOM COLOR
			BL BLUE

COLOR TEMPERATURE	HOUSING LENGTH	BASE STYLE	ACRYLIC OPTION	ACRYLIC LENGTH
-	-	-	-	-
41 4100K	05 5 INCHES	TDS TRADITIONAL SUSPENDED BASE	W/O ACRYLIC	08 8 INCHES
35 3500K	08 8 INCHES	RCS RECESSED SUSPENDED BASE	A WITH ACRYLIC	CL CUSTOM LENGTH
30 3000K	12 12 INCHES			
27 2700K	CL CUSTOM LENGTH			

C-1

