


RECESSEDWALL25-IR-S INFRA-RED SENSOR

MOTION DETECTION RANGE 0-7FT | WET LOCATION [IP66]



PRODUCT NAME	RecessedWall25 Infra-red Sensor
APPLICATION	Sensor Control
LED INPUT VOLTAGE	5-12 VDC
WEIGHT	0.1 lb (0.05 kg)
POWER FACTOR	>0.9
CONSTRUCTION	Extruded aluminum housing has a diameter of 1". Fixture will be enclosed and sealed with silicone in a standard 1" diameter copper tube for installation (provided by others). Infra-red Sensor will be installed in fixture.
RANGE	Motion detection range of 0-7ft.
APPROVAL	Wet location listed, IP66 Rated.
LENGTH	Total luminaire length 4".
WARRANTY	Two-year warranty; coverage includes luminaire construction and infra-red sensor. Terms and conditions apply.
OPERATING TEMPERATURE	-30°C to 40°C

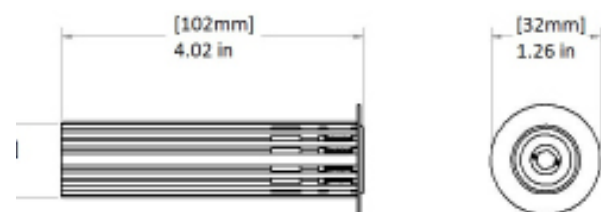


WET LOCATION [IP66]



PRODUCT	MODULE	COLOR	SENSOR
RW25	M1X1	-IR	-S
RW25	M1X1	1 MODULE WITH 1 CHIP	IR INFARED S SENSOR

SMART LIGHTING CONTROL CONTROL BOX

MOTION DETECTION RANGE 0-7FT | WET LOCATION [IP66]

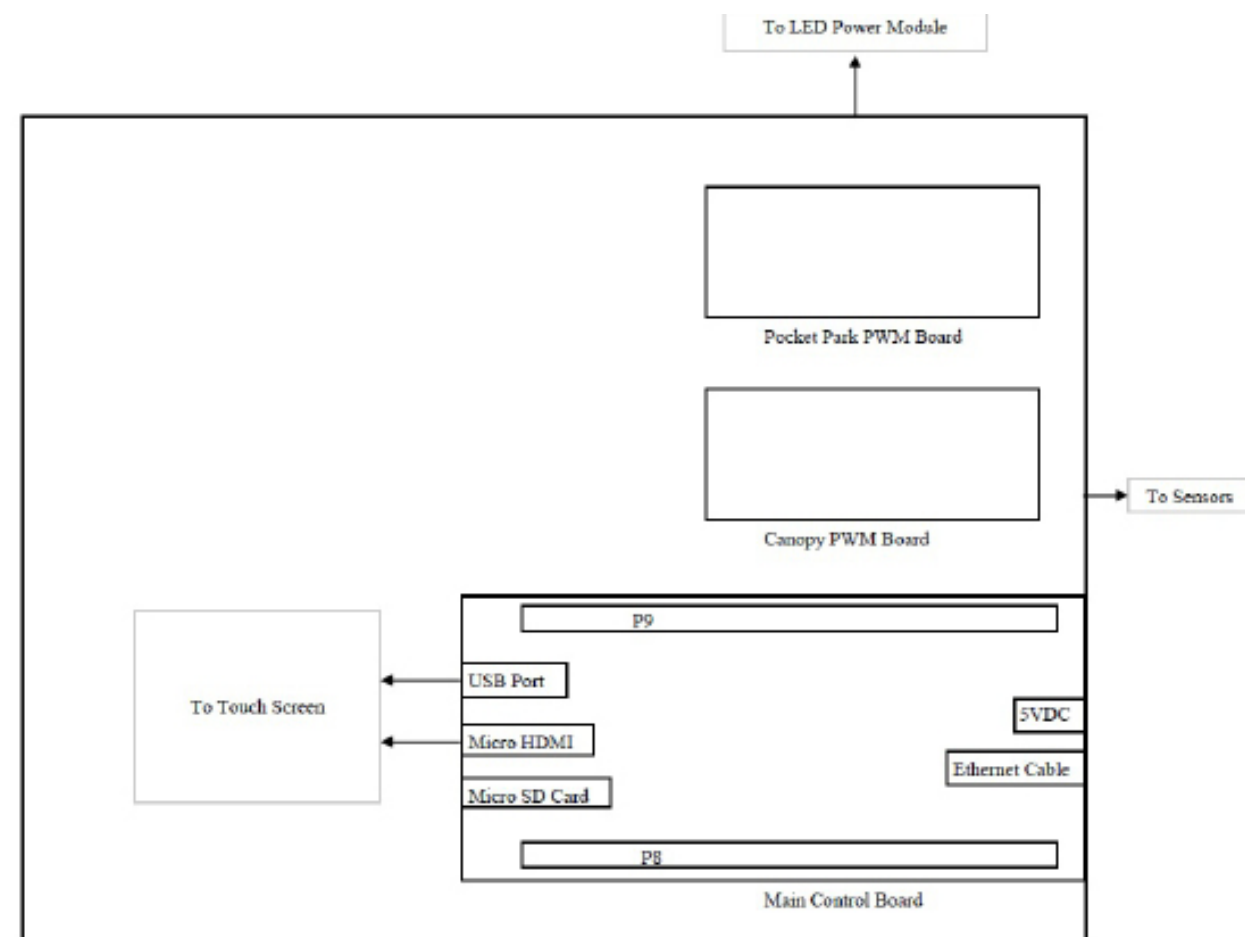

CALL FOR DETAILS