

## DESCRIPTION:

Unique luminaire, SunStrip30, is a revolutionary energy saving linear fixture with an efficacy of 157 lm/watt (ST30Y60P5X15N). This ST30N fixture has an extremely sleek profile (1-1/4" W X 1-1/4" H), only weighs 1.3 lbs, and is UL/cUL listed for damp (IP64) locations. The ST30Y60P5X15N luminaire comes standard with a diffuser which provides a 170° beam angle, optionally without a diffuser which provides a 90° beam angle. The modular nature of the ST30 product line makes it scalable not only in linear footage and lumen output, but also in the price structure: providing flexibility in all design aspects of a project which allows for the perfect lighting scheme to be achieved. With super bright energy efficient LEDs, the SunStrip30's sleek profile, rugged construction, multiple mounting options, and multiple finishes make this ST30Y60P5X15N linear light the right choice for illuminating any installation where the best illumination, sleek integrated design, and energy savings are desired.

## SPECIFICATIONS:

### LUMINAIRE:

Total luminaire length 60".  
31mm X 31mm profile with five available mounting options.

### CONSTRUCTION:

Extruded anodized aluminum housing has a 31mm X 31mm profile. Metal mounting brackets are mechanically fit to fixture.

### MODULE:

Four LED modules with fifteen chips utilizing Sunlite proprietary application specific technology with five available color temperature options (2700K, 3000K, 3500K, 4100K, and 5000K).

### CONTROLS:

0-10V Dimming when utilizing suggested dimming AC-DC driver down to 10%. Smart lighting compatible.

### OPTICS:

Optical system consists of high performance diffuser with transmission of over 90%, which hides the LED source and provides excellent glare control.

### FINISH:

Standard finish for housing is anodized aluminum. Consult factory for custom colors.

### ENVIRONMENT:

Damp location rated. Fixture operating temperature -30°C to 40°C.

### WARRANTY:

Five-year warranty for fixture and driver. Terms and conditions apply.

### ELECTRICAL:

SunStrip30 setup consists of multiple fixtures and [0-10V dimming] AC-DC driver. Fixture input wattage is 38W for 5875 delivered-lumen package per 5000K fixture.

Specify 110V to 277V to driver. Wire lights with 18AWG CL2 wire. For special circuiting or wire gauge, consult factory.

### LIFETIME:

Designed and built to last over 60,000 hours.

### VALIDATION:

UL/cUL listed.

### SHIPPING:

Approximate net shipping weight is 1.5 lb (0.68 kg).



PROJECT:

PRODUCT:

LOCATION:

CONTACT:



**SUNSTRIP30**

**STRIP LIGHT**

**ST30Y60P5X15N**




**-48V**

**SOLID STATE LED**

**USE:**

**LINEAR LIGHT**

## DIMENSIONS:



### CONTACT:

4811 Quail Crest Place  
Lawrence, KS 66049  
www.sunlitest.com  
T:785.856.0219

### CERTIFICATION:

UL and cUL  
Damp Location Listed  
IP64 Rated

### ENERGY:

>0.9 Power Factor  
48VDC/~800mA  
-30° C to 40°C  
38W

### SHIPPING:

Approx. Net Weight  
1.5 lbs (0.75 kgs)

**CATALOG NUMBER:**

EXAMPLE PRODUCT CODE: ST30Y60P5X15N-D-48V-SV-50-MPB

-  -  -  -


PRODUCT	LENGTH	LED MODULE SIZE	SECONDARY LENS
ST30	Y60 60 INCHES	P5X15N 2 MODULES WITH 15 CHIPS	D DIFFUSED LENS CL CLEAR LENS

VOLTAGE	HOUSING COLOR	COLOR TEMPERATURE	MOUNTING BRACKET STYLE
48V DC	SV SILVER	50 5000K	MPB METAL PIVOT BRACKET
	BK BLACK	41 4100K	RCS RECESSED SUSPENDED BASE
	CC CUSTOM COLOR	35 3500K	TDS TRADITIONAL SUSPENDED BASE
		30 3000K	
		27 2700K	

**RECOMMENDED DRIVERS:**

**BASIC DRIVERS AND WIRING**

NON-DIMMABLE DRIVERS		
LPV-60-48	LPV-100-48	
1 FIXTURES IN PARALLEL	2 FIXTURES IN PARALLEL	

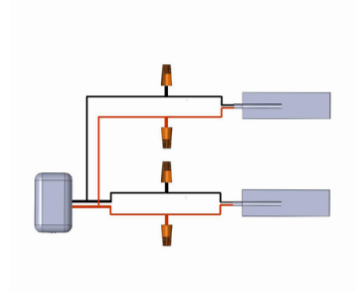

CALL FOR DRIVER OPTIONS FOR MULTIPLE FIXTURES

**LUMEN OUTPUT:**

COLOR TEMPERATURE	WATTAGE	LUMEN	CRI*
2700K	38	5052	80
3000K	38	5287	80
3500K	38	5440	80
4100K	38	5580	80
5000K	38	5875	80


\* CRI > 90 ARE AVAILABLE UPON REQUEST

**WORKPLANE FOOT CANDLE:**

DISTANCE FROM WORKPLANE	HALF VALUE COVERAGE (FT)	LIGHT LEVEL (FC)
3	6	293
6	13	75
8	17	41
10	21	27

FC = FOOT CANDEL

**PHOTOMETRICS:**



ST30Y60P5X15N-D-48V-50

**TYPICAL MOUNTING CONFIGURATIONS:**

